

INSTRUCTIONS FOR #84434 GRAIN ENHANCER TOOL


**Caution! Make sure
the iron is cool!**

Now install the blade in the chuck so that the tip protrudes as shown in the photo at right. Tighten the knurled nut securely.



Plug in the iron and wait 15 minutes for it to reach a high temperature.

While the iron is heating, obtain a few scraps of wood on which to practice your woodburning/grain-enhancing technique. When the iron is hot, bring the blade into contact with the wood surface and immediately draw it along the natural grain. If you stop moving without removing the blade from the wood surface, you may leave a burn mark, so be sure to lift the blade from the surface while it is in motion. Practice steering and turning the blade in various directions to obtain a natural grain pattern. You can use one corner of the blade to burn small spots that will give the appearance of knot holes.

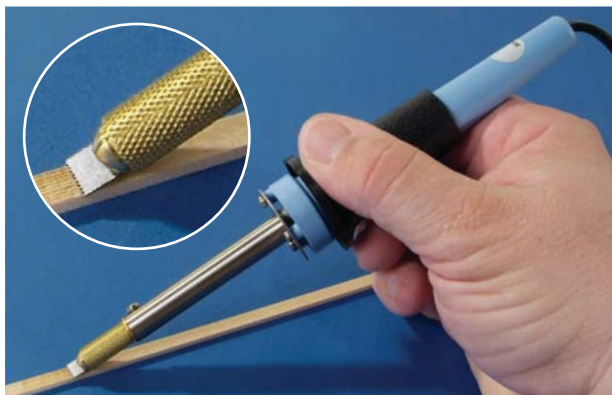

The Grain Enhancer Tool works on bare wood or on wood that has been treated with a weathering stain, such as Micro-Mark Age-It Easy. When used with stained wood, the heated blade will naturally cause a realistic variation of the surface color, and weathering will be more pronounced.



Micro-Mark[®]

340 Snyder Avenue, Berkeley Heights, NJ 07922

Tech Support: 908-464-1094, weekdays, 1 pm to 5 pm ET

www.micromark.com MMTechService@micromark.com